

EZYTRACK

FX51-24, FX64-24, FX76-24. FX76-24, FX92-24, FX-150-24

i PRODUCT DESCRIPTION

The Studco EzyTrack is a flexible track system engineered to construct curved walls and bulkheads. The EzyTrack locks into position to perfectly match the required radius of the wall. Curved walls can be tedious to construct using traditional materials, but Studco's EzyTrack provides a cost-effective alternative for building walls to your desired curve in a fraction of the time.

l FEATURES

- Easily manoeuvrable and flexible track.
- Suitable for forming complex shapes or repetitive curves.
- Can be moved into shape by hand or against a template.
- Versatile system that allows you to create simple radius corners or combination curves.
- EzyTrack can also be used in deflection situations.
- Range of sizes available accommodating for 51mm-150mm studs.


h INSTALLATION

1. Manoeuvre the track into the desired shape.
2. 'Lock' the track using into position using a self-drill screw through the sliding strap into the track segments.
3. Ensure that a suitable anchor or fixing is placed in the track at the location of each stud.
4. Use Studco lipped steel studs at the centres specified in the EzyTrack Configurations table below. Fixing the studs to the track (where applicable) through the sliding strap using self-drilling screws.

Refer to separate installation instructions for more details.

w PERFORMANCE

Application of the plasterboard to the wall framing may require preparation such as water spraying or sponge soaking, to aid with curvature of the lining board material. Any such preparation should be done on the compression side of the plasterboard and strictly in accordance with the lining board manufacturers specifications.

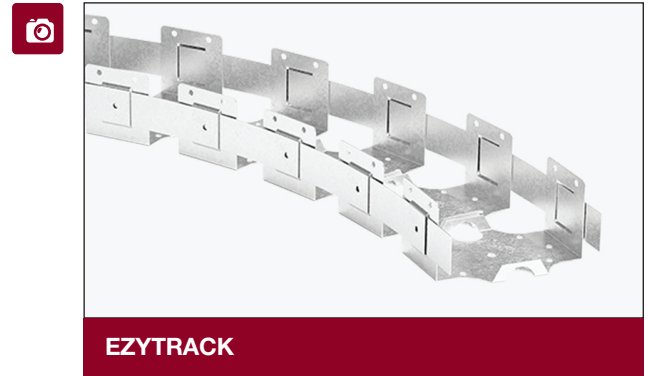

STUD CENTRES - CURVED WALL							
PLASTER BOARD THICKNESS	WALL RADIUS						
	800mm-1000mm	1000mm - 1500mm	1500mm - 2000mm	2000mm - 2500mm	2500mm - 3000mm	3000mm - 4000mm	Over 4000mm
	MAXIMUM WALL STUD CENTRES						
6.5mm	150mm	200mm	250mm	300mm	350mm	450mm	550mm
10mm	150mm	200mm	250mm	300mm	350mm	450mm	550mm
13mm	--	150mm	200mm	250mm	300mm	400mm	500mm
16mm	--	--	--	150mm	200mm	250mm	350mm

For Sales Enquiries, please contact Studco Building Systems on 1300 255 255

EZYTRACK

FX51-24, FX64-24, FX76-24. FX76-24, FX92-24, FX-150-24

Leaders in Innovative
Building Products

APPLICATION

Application of the plasterboard to the wall framing may require preparation such as water spraying or sponge soaking, to aid with curvature of the lining board material. Any such preparation should be done on the compression side of the plasterboard and strictly in accordance with the lining board manufacturers specifications.

PRODUCT RANGE

Ordering Information

Available for 51mm, 64mm, 76mm, 92mm and 150mm stud. Dimensions below:

Product Code	Product Info	Width (mm)	Length (mm)	Depth (mm)	Approx Kg / Piece	Sub Pack	Stock Pack
FX51-24	EzyTrack 51mm	51	2400	0.55	1.9	1	50
FX64-24	EzyTrack 64mm	64	2400	0.55	2.07	1	50
FX76-24	EzyTrack 76mm	76	2400	0.55	2.08	10	100
FX92-24	EzyTrack 92mm	92	2400	0.75	2.12	10	100
FX150-24	EzyTrack 150mm	150	2400	0.75	2.54	1	50


WARRANTY

This product is covered by Studco's Warranty. Conditions and limitations of warranties are set out in Studco Project Warranty certificate.

FURTHER ASSISTANCE

Contact the Technical Team at Studco for assistance with specifications, product selection, acoustic engineering, and structural engineering enquiries. Call on 1300 255 255 or contact us at sales@studcosystems.com.au.

ACCREDITATION



For Sales Enquiries, please contact Studco Building Systems on 1300 255 255

Studco Building Systems Australia Pty Ltd | 130-140 Merrindale Drive Croydon South VIC 3136 | www.studcosystems.com.au